QUOTATION TO 2430 "E" Street Washington 25, D. C. Date May 12, 1960

This Quotation is submitted in answer to your inquiry No. **Verbal**

Dated This quotation is subject to the special conditions set forth on the reverse side of this sheet.

Terms-1º 10th prox. Net 30 days.

Prices F.O.B. Metropolitan area Washington, D.C.

L.

STATINTL

STATINTL

DEHYDRATION EQUIPMENT

(1) Dryer to maintain a relative humidity of 20% dry bulb temperature of 80° F.

At 80°F, dry bulb temperature and 20% relative humidity, this is a moisture content in the air of 2.2 grains per cubic foot. We understand this room is to be 16' \times 20' \times 12'. The moisture load will not exceed one gallon per hour of films being carried into the room.

STATINTL

For this service, we recommend the use of Dryer H-14, having a dry air flow of 700 cfm. This flow would result in an air change each 5 to 6 minutes and our calculations show that this amount of flow is necessary to remove the moisture from the room.

This equipment will require 15 gpm for the after-cooling waters not to exceed 90°F.

Electrical requirements - 220-440 volts at 20 kw.

STATINTL


Price, delivered Metropolitan area Washington, D.C.....

Unloading would be buyer's responsibility.

-SIAHNIL

Declass Review by NIMA/DOD

STATINTL

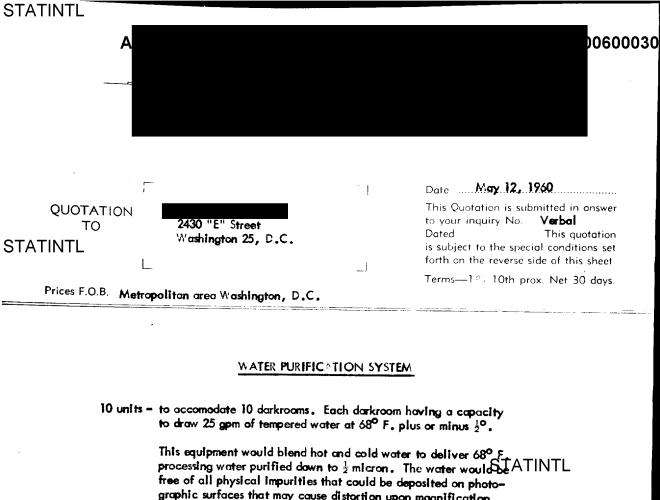

graphic surfaces that may cause distortion upon magnification.

STATINTL